

Pecan Eco L

GPE.0300



Ø 150 Pijpdiameter (mm)
Pipe diameter (mm)
Diamètre buse (mm)
Abgasstutzen (mm)

KG 350 Gewicht (kg)
Weight (kg)
Poids (kg)
Gewicht (kg)

→ Externe luchttoevoer
External air supply
Prise d'air extérieure
Externer Luftanschluss

% 82,0 Efficiëntie
Efficiency
Efficacité
Effizienz


⬆ Boven aansluiting
Connection top
Raccordement dessus
Anschluss oben

🪨 Natuursteen
Natural stone
Pierre naturelle
Naturstein

kW 8,0 Vermogen output (kW)
Capacity output (kW)
Puissance output (kW)
Leistung output (kW)

⬇ Achteraansluiting
Connection back
Raccordement arrière
Anschluss hinten

B² Bimsch 2
Bimsch 2
Bimsch 2
Bimsch 2

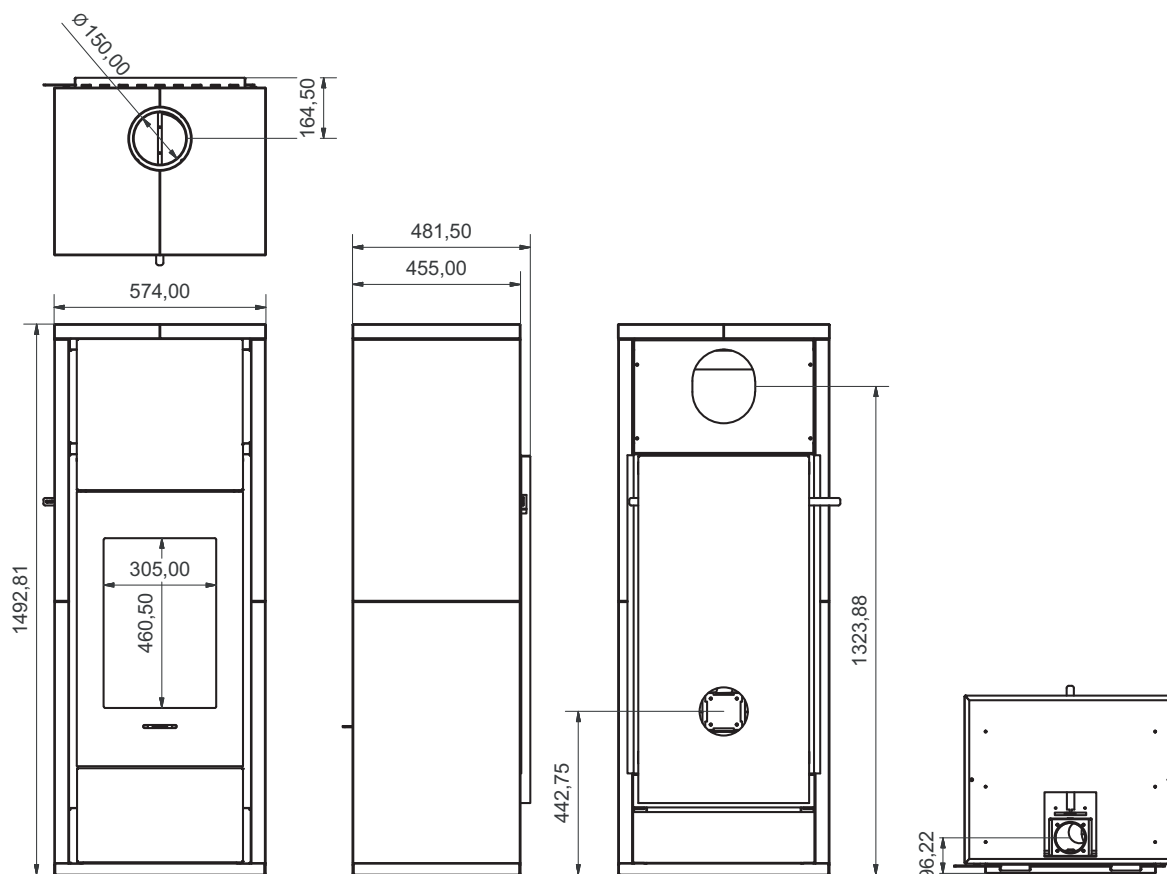

Wanders fires & stoves
Amtweg 4
7077 AL NETTERDEN
The Netherlands
Tel: +31 (0)315 - 386 414
Fax: +31 (0)315 - 386 201
info@wanders.nl
www.wanders.nl



wanders
fires & stoves

© 2016 Wanders Metaalproducten B.V.